


## SS 10018

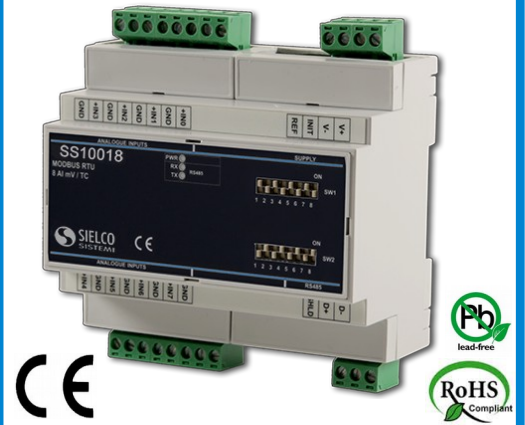

### FEATURES

- Modbus Slave device on RS-485
- Modbus RTU/ Modbus ASCII protocol
- 8 input channels for voltage up to  $\pm 250$  mV and thermocouples sensor type B, E, K, J, N, R, S, T
- Communication parameters configurable by dip-switches
- Watch-Dog Alarm
- Remotely Configurable
- 1500 Vac 3-ways Galvanic Isolation
- LEDs of signalling on front side for power supply and communication
- Connection by removable screw terminals
- High Accuracy
- CE mark
- DIN rail mounting in compliance with EN-50022

### GENERAL DESCRIPTION

The device SS10018 converts up to 8 analogue input signals into engineering units in digital format. The data are transmitted with MODBUS RTU/ASCII protocol over the RS-485 network.

It is possible to connect on input 8 voltage signals up to  $\pm 250$  mV or thermocouples sensor type B, E, K, J, N, R, S, T. By programming, it is possible to execute the scaling of the measure of input up to  $\pm 32768$  points obtaining in the dedicated registers the measure of the channel in the desired format.

The device guarantees high accuracy and stable measure versus time and temperature.

To ensure the plant safety, a Watch-Dog timer alarm is provided.

The isolation between the parts of circuit removes eventual ground-loop effects, allowing the use of the device even in the heavy environmental conditions.

The device is housed in a 6 module DIN rough self-extinguishing plastic box for mounting on EN-50022 standard DIN rail.

### COMMUNICATION PROTOCOLS

The device is designed to work with the MODBUS RTU/ASCII protocol: standard protocol in field-bus; allows to directly interface SS10000 series devices to the larger part of PLCs and SCADA applications available on the market.

### USER INSTRUCTIONS

Before to install the device, please read the "Installation Instruction" section.

It is possible to configure the device in two modes: by the dip-switches located on the front of the device or via software using the INIT modality.

Connect the terminal INIT to the terminal REF; at the power-on the device will be automatically set in the configuration set-up.

Connect power supply, serial bus and analogue inputs as shown in the "Wiring" section.

The LEDs state depends on the working condition of the device: see the "Light Signalling" section to verify the device working state.

To simplify handling or replacing of the device, it is possible to remove the wired terminals even with the device powered.

### TECHNICAL SPECIFICATIONS (Typical @ 25 °C and in the nominal conditions)

INPUT			Input Accuracy (1)		POWER SUPPLY	
Input type	Min	Max	mV, TC	> of $\pm 0.05\%$ f.s. or 5 $\mu$ V	Power supply voltage	10 .. 30 Vdc
<b>Voltage</b>					Reverse polarity protection	60 Vdc max
50 mV	-50 mV	+50 mV	<b>Linearity (1)</b>		<b>Current consumption</b>	
100 mV	-100 mV	+100 mV	mV	$\pm 0.1\%$ f.s.	(operative)	35 mA max@24Vdc
250 mV	-250 mV	+250 mV	TC	$\pm 0.2\%$ f.s.		45 mA max@10Vdc
<b>Thermocouple</b>			<b>CJC Compensation</b>	$\pm 1$ °C	<b>ISOLATION</b>	
J	-210 °C	+1200 °C			Between all the ways	1500 Vac, 50 Hz, 1 min
K	-210 °C	+1372 °C	<b>Input impedance</b>		<b>ENVIRONMENTAL CONDITIONS</b>	
R	-50 °C	+1767 °C	mV, TC	$\geq 1$ M $\Omega$	Operative Temperature	-10 °C .. +60 °C
S	-50 °C	+1767 °C	<b>Thermal drift (1)</b>		Storage Temperature	-40 °C.. +85 °C
B	+400 °C	+1825 °C	Full scale	$\pm 0.005\%$ / °C	Humidity (not condensed)	0 .. 90 %
E	-210 °C	+1000 °C	<b>Thermal drift CJC</b>		Maximum Altitude	2000 m
T	-210 °C	+400 °C	Full scale	$\pm 0.02\%$ / °C	Installation	Indoor
N	-210 °C	+1300 °C	<b>Line resistance influence (1)</b>		Category of installation	II
			mV, TC	< 0.8 $\mu$ V/Ohm	Pollution Degree	2
			<b>Sample time</b>	0.5 $\div$ 1 sec.	<b>MECHANICAL SPECIFICATIONS</b>	
			<b>Warm-up time</b>	3 min	Material	Self-extinguish plastic
			<b>Data Transmission (RS-485 asynchronous serial)</b>		IP Code	IP20
			Baud Rate	115.2 Kbps	Wiring	wires with diameter 0.8 $\div$ 2.1 mm <sup>2</sup> /AWG 14-18
			Max. distance	1.2 Km – 4000 ft	Tightening Torque	0.5 N m
					Mounting	in compliance to DIN rail standard EN-50022
					Weight	about 200 g.
					<b>CERTIFICATIONS</b>	
					<b>EMC ( for industrial environments)</b>	
					Immunity	EN 61000-6-2
					Emission	EN 61000-6-4

(1) referred to the input Span (difference between max. and min.)

## INSTALLATION INSTRUCTIONS


The SS10018 is suitable for fitting to DIN rails in the vertical position. For optimum operation and long life follow these instructions:

**When the devices are installed side by side it may be necessary to separate them by at least 5 mm in the following case:**  
 - If panel temperature exceeds 45°C and power supply voltage 10 Vdc.

Make sure that sufficient air flow is provided for the device avoiding to place raceways or other objects which could obstruct the ventilation slits. Moreover it is suggested to avoid that devices are mounted above appliances generating heat; their ideal place should be in the lower part of the panel. Install the device in a place without vibrations.

Moreover it is suggested to avoid routing conductors near power signal cables (motors, induction ovens, inverters etc...) and to use shielded cable for connecting signals.

## WIRING

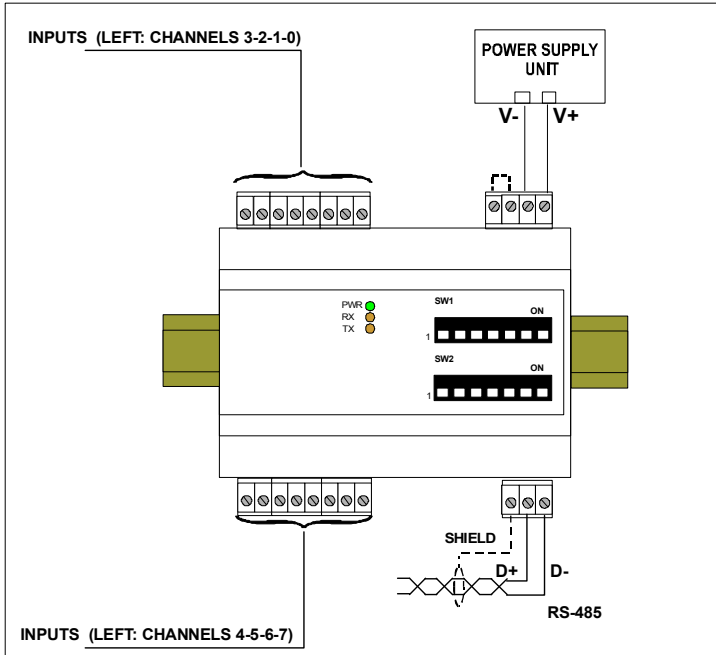


## LIGHT SIGNALLING

LED	COLOUR	STATE	DESCRIPTION
PWR	GREEN	ON	Device powered
		OFF	Device not powered
		BLINK	~1 sec. - Watch-Dog alarm condition occurred
RX	ORANGE	BLINK	Stream of data over receiving line of RS-485
		OFF	No data over receiving line of RS-485
TX	ORANGE	BLINK	Stream of data over transmission line of RS-485
		OFF	No data over transmission line of RS-485

## ISOLATION STRUCTURE




## MECHANICAL DIMENSIONS (mm)

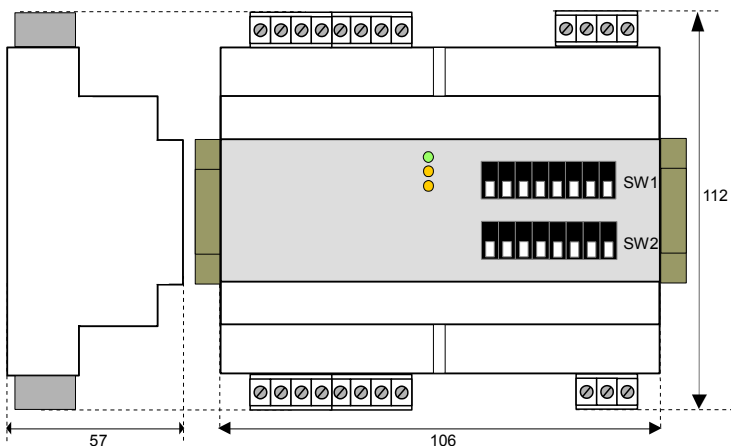


## CONNECTIONS

### ANALOGUE INPUTS

#### VOLTAGE

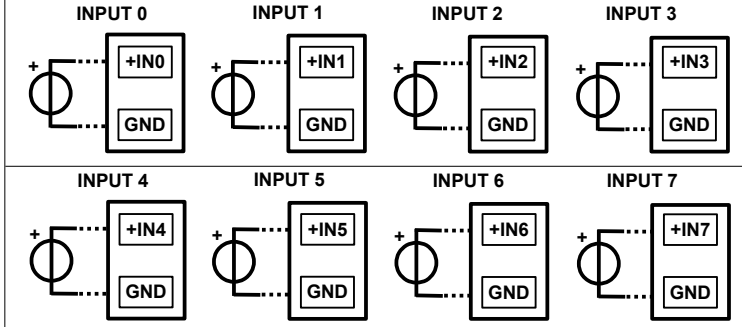


#### THERMOCOUPLES

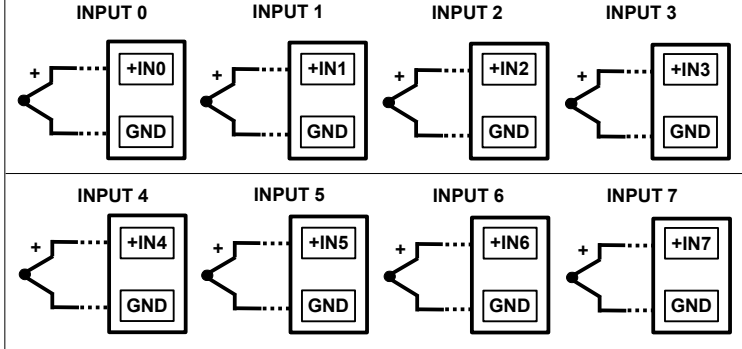


NOTE: the input channels are not isolated between them (terminal GND is common)


### SERIAL LINE RS-485

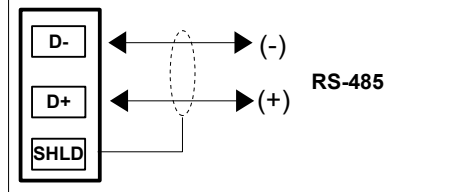

### POWER SUPPLY

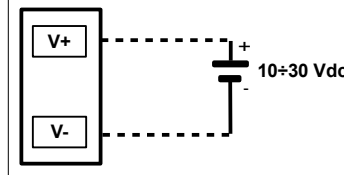


### INIT

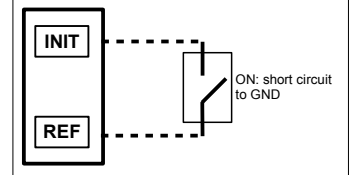


## DIP-SWITCHES : TABLES OF CONFIGURATION

Warning: set all the dip-switches in OFF position to access to the device in EEPROM modality (the device will follow all the communication parameters set by software) or INIT. Power-off the device before to change the set of the dip-switches.


TAB.1 Mode settings (Pos.1)



TAB.2 Parity settings (Pos.2 LSB; Pos.3 MSB)




TAB.3 Baud rate settings (Pos.4 LSB; Pos.6 MSB)

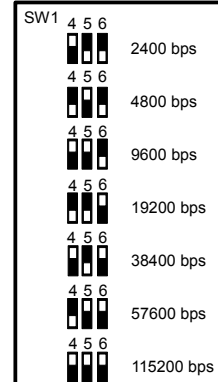

#### DIP POSITION



TAB.4 Address Selection 1+247 (Pos.1 LSB; Pos.8 MSB)

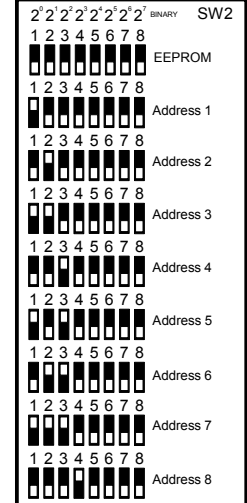

Note (\*):  
 - in Modbus RTU Mode the setting is NONE; number of bit = 8  
 - in Modbus ASCII Mode the setting is MARK; number of bit = 7

## HOW TO ORDER

The SS10018 could be supplied as requested from the customer. Refer to the section "Technical Specifications" for the input type available.

SS 10018 / [TCK] — Input type